

▼ SBL1100



- Self-contained hydraulics and electronics
- Intelli-Lift wireless control system
- Self-propelled wheels or tank rollers
- Foldable boom on SBL900, SBL1100, MBL500 and MBL600
- Full range of supplementary equipment: header beams, lifting lugs, side shifts and skid tracks
- Designed and tested to meet ASME B30.1-2015 safety standards
- Lloyds witness tested to 120% of maximum working load.

Precision Lift and Position of Heavy Loads

The Ultimate in Safety and Control



Intelli-Lift Wireless Control

The Intelli-Lift wireless control system is included with all Enerpac hydraulic gantries.

The Intelli-Lift controller offers superior safety and control and includes the following features:

- Encrypted bi-directional communication that eliminates interference from other devices
- Remote operation using multi channel wireless (2.4 GHz) or wired (RS-485) control
- High and low speed settings
- Automatic synchronization of lifting with an accuracy of 24 mm (0.95 inch)
- Automatic synchronization of travelling with an accuracy of 15 mm (0.60 inch)
- Overload and stroke alarms
- Remote side shift control
- Emergency stop switch.

▼ SBL1100



Maximum Capacity (with 4 towers)	Model Number (4 towers)	Retracted Height
ton (kN)		A (mm)
60 (600)	SL 60	1997
125 (1250)	SL 125	2700
400 (4000)	SL 400	3170
500 (5000)	SBL 500	3028
900 (8976)	SBL 900	5000
1069 (10.484)	SBL 1100	4370
500 (5000)	MBL 500	6098
600 (6000)	MBL 600	6553



Hydraulic Gantries

Hydraulic Gantries are a safe, efficient way to lift and position heavy loads in applications where traditional cranes will not fit and permanent overhead structures for job cranes are not an option.

Hydraulic Gantries are placed on skid tracks to provide a means for moving and placing heavy loads, many times with only one pick.

Enerpac offers three series of Hydraulic Gantry systems:

- **SL-Series Super Lift**

The cost-effective SL-Series Super Lift offer control and stability for everyday lifting applications below 400 ton up to 9 metres

- **SBL-Series Super Boom Lift**

The heavy-duty SBL-Series Super Boom Lift boom style gantries offer increased lifting capacity of over 400 ton to heights of almost 12,2 metres.

- **MBL-Series Mega Boom Lift**

The massive MBL-Series Mega Boom Lift offers capacities and lifting heights of over 600 ton at almost 14,6 metres extreme lifting conditions.

All Enerpac gantries are delivered with specific properties and control systems to ensure optimum stability and safety.

SL, SBL, MBL Series



Capacity with 4 towers:

61 - 1069 ton

Lift Height:

3,49 - 14,55 meters

▼ Optional Gantry Accessories

Contact Enerpac for assistance by email at integratedsolutions@enerpac.com



Skid Tracks

Allows for easy levelling of the gantry tower, available in two standard lengths, 3 and 6 m.



Header Beams

Sold in pairs and includes lifting points and fork pockets for easy positioning on gantry towers. Available in standard lengths of 8, 10 and 12 meters




Powered Side Shift

Electric propulsion controlled by standard gantry controls. Each set consists of 4 units and 2 extension bars.



Lifting Lugs

Designed to transfer the load to the top of the header beam. Can accommodate a 250 ton shackle or attach directly to the lifted load.

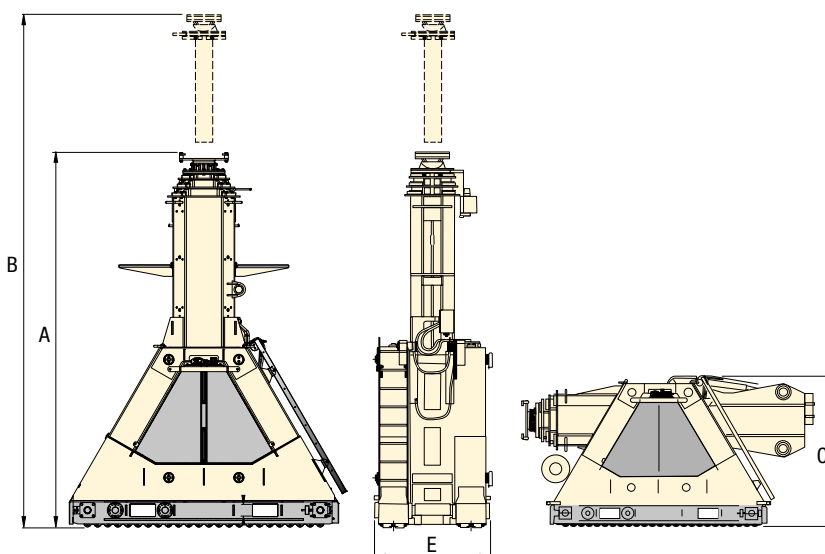

Stage 1		Stage 2 ¹⁾		Stage 3		Transport Height	Skid Track Width	Model Number (4 towers)	
Max. Height	Max. Capacity	Max. Height	Max. Capacity	Max. Height	Max. Capacity				
B (mm)	(ton)	B (mm)	(ton)	B (mm)	(ton)	C (mm)	E (mm)	(kg) ²⁾	
3397	15	4956	15	-	-	2034	770	1050	SL 60
4635	31	6700	31	-	-	2762	812	2130	SL 125
5228	100	7236	100	9144	46	3170	1218	4600	SL 400
4988	130	6898	130	8608	75	3028	1218	6300	SBL 500
8300	224	11300	148	-	-	2243	1218	13.350	SBL 900
7004	262	9668	169	12.002	94	2244	1218	11.950	SBL 1100
-	125	12.867	125	-	-	2243	1682	19.750	MBL 500
-	150	14.552	150	-	-	2525	1982	20.950	MBL 600

¹⁾ MBL500 and MBL600 are two stage gantries; stages 1 and 2 extend simultaneously and provide full capacity at any height. ²⁾ Weight per tower